


# DIVA L RANGE

Automatic sliding door

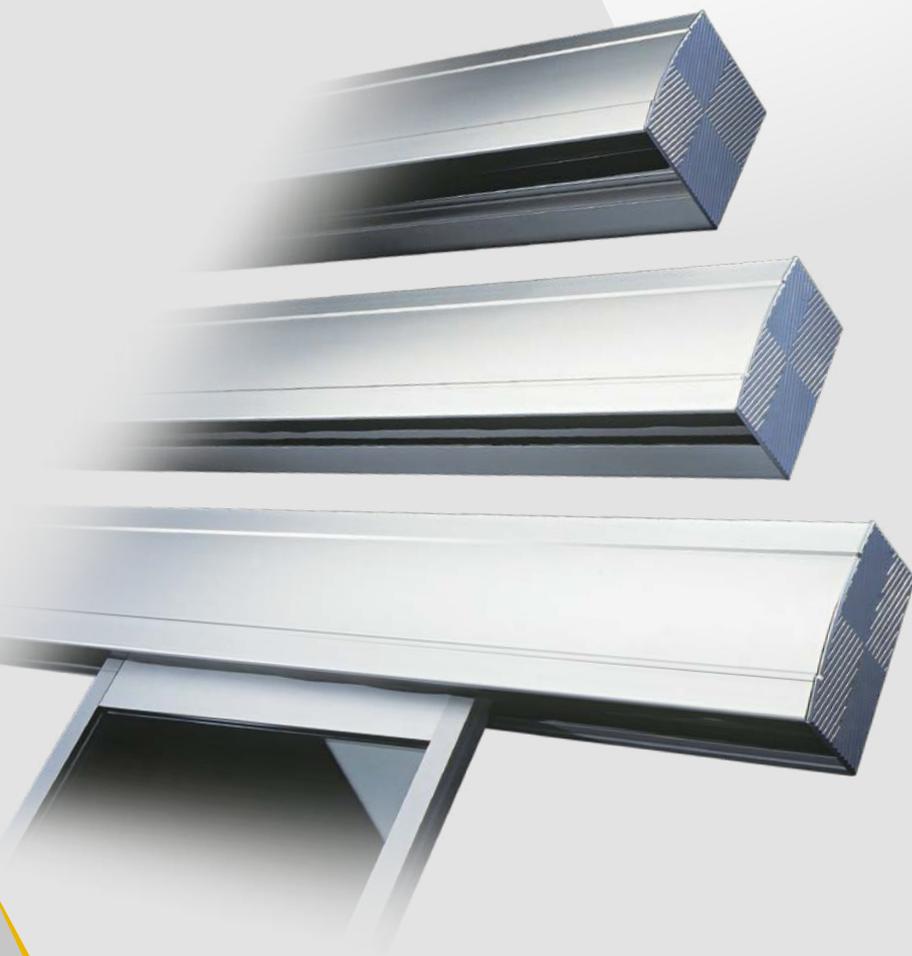

Discover the functionalities of DIVA L3, its easy use is closely linked to astonishing agility of NAVIBLU and VISIOBLU.

Combining performance and reliability, the DIVA L range is designed for heavy traffic and intensive use.

The range is made of two models:

- Sliding doors
- Telescopic doors



DOUBLE SLIDING




SIMPLE SLIDING

# DIVA L


Upgradable sliding and telescopic doors which can meet all your requests when needed.




- An operator designed for high traffic situations
- Upgradable functions
- Easy installation and settings

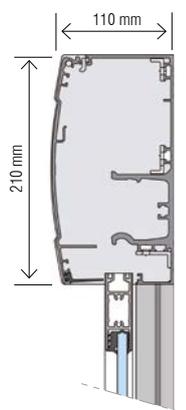

Standard Casing

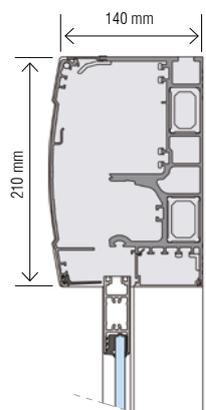

Reinforced Casing

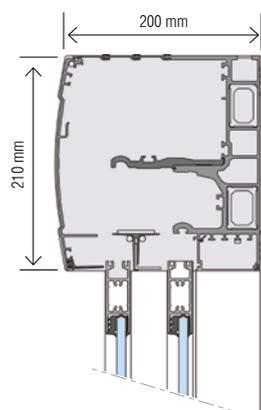

Telescopic Casing

## Profiles

To better meet the requirements of each application, the DIVA L doors frames are available in different ranges of profiles: LUMINA All glass or with thin profiles, G25 or G38 profiles.

These profiles ranges are especially designed to comply with the safety standards in force (ex: finger trapped in the door). The standard frames are mounted with a neoprene seal (non-silicon) that enables the glass to be replaced quickly.

The G38 range is a robust solution which makes thick isolating glazing up to 26 mm possible. A key locking (European cylinder) can also be mounted with these profiles.

LUMINA  
All glass

LUMINA  
Thin profiles

G25 profiles

G38 profiles





DOUBLE  
TELESCOPIC



SIMPLE  
TELESCOPIC



A complete equipment provides all the comfort and safety of operation for the user.

## NAVIBLU and VISIOBLU, real control consoles

NAVIBLU and VISIOBLU are user-friendly and high-performance control interfaces. They allow easy driving, easy adjusting and easy communicating with the door. The LCD screen indicates the door's state in the most universal language that consists of pictograms, figures and international measuring units.



Naviblu, designed for wall mounted installation, allows controlling the door simply at one's fingertips thanks to its unique central browsing

button.

Visioblu, designed to be installed on the casing, operates with the S remote control, offering all the comfort of remotely controlled operations.

The 2 systems are equipped with an IR receiver to learn up to 20 keys or S remote controls.

Their numerous features offer a great flexibility of use (choice of operating modes, settings of the door, historic consultation of defects and counters, automatic entries diagnosis...).

## Controls and activation devices

To provide the optimal solution for your project, the product is offered with a large choice of controls and detection devices.

The ultra-high frequency radars provide completely discrete, reliable, high-performance detection.

The infrared curtains detect any presence in the passage or any obstacle preventing the door leaves from closing. Permanently monitored, any anomaly in their functioning is automatically detected.

Inputs/Outputs modules offer even greater flexibility whilst enabling additional systems to be connected:

- Additional safety device in closure or in opening
- Priority open control
- Forced mode order
- Additional access control system (Intercom, PRM device...)
- Dry informations contacts about the door condition

All the standard functions are accessible and can be parameterised without any specific tool. The user can use simplified or multi-functional control systems depending on his or her needs.



Naviblu



Visioblu and  
S remote control



Console 4T



80 mm 6-position  
key selector



40 mm 6-position  
key selector



Hyperfrequency detector  
and active Infrared security

MECHANICALS		SLIDING	TELESCOPIC
Installation		Surface applied / Between walls / Against posts	
Structure		Aluminium	
Casing (H x D)	Applied	110 mm x 210 mm	-
	Reinforced	140 mm x 210 mm	-
	Telescopic	-	200 mm x 210
Self supporting casing		5 000 mm	4 000 mm
Passage width min/max	1 leaf	750 / 1 800 mm	
	2 leaves	800 / 3 600 mm	1 050 / 3 000 mm
	4 leaves		1 400 / 3 600 mm
Max. passage height		3 100 mm	

PERFORMANCES			
Max. leaf weight		1 x 120 kg / 2 x 120 kg	2 x 60 kg / 4 x 40 kg
	with IME (Emergency Exits)	1 x 105 kg / 2 x 85 kg	2 x 60 kg / 4 x 40 kg
Opening speed		1 leaf: 10 to 80 cm/s - 2 leaves: 20 to 160 cm/s	
Closing speed		1 leaf: 10 to 50 cm/s - 2 leaves: 20 to 100 cm/s	
Hold open time		1 to 25 s	
Opening force		3,3 to 15 daN	
Closing force		3,3 to 15 daN	

ELECTRICAL ENVIRONMENT			
Power supply		Mains 50-60 Hz, 230 V ±10 % with earth	
Average absorbed power		50 W	
Motor voltage / Emergency battery		30 Vcc / 12 Vcc (1,2 A/h)	
Relative humidity		10 % to 93 % without condensation	
Operating temperature		-20°C/+60°C - Emergency exits doors according to EN16005 :+5°C/+40°C	

STANDARDS	
EC	Electromagnetic compatibility: 2004/108/CE directive, Electrical security- Low voltage: 2006/95/CEE directive - Directive machines 2006/42/CE.
EN 61000-6-3	EMC: emission for residential, commercial and light-industrial environments.
EN 61000-6-2	EMC: immunity for industrial environments.
EN 60335-1/-2-103	Safety of household and similar electrical appliances.
EN 16005	Pedestrian motorised doors : use safety

NAVIBLU AND VISIOBLU FUNCTIONALITIES	
Operating mode selection	Door settings
Secure access using a code	- Door movement (speeds, torque, brakes)
Faults display	- Opening width (small, large, security)
Entries status diagnosis	- Time delay (radars, openings, keys)
Defects historic consultation, counters	- Locking, battery operation
IR receiver	- Inputs/Outputs parameterisation
Reset	- People with Reduced Mobility function, Standard (CO48, BS, EN 16005 Emergency exits)

EQUIPMENT / CONTROLS / SAFETIES / FINISHING TOUCHES			
Emergency battery	●	Naviblu or Visioblu or Console 4T	○
Fail Safe locking	○	IR receiver	○
Manual inside safety unlocking	●	Infrared remote control	○
Positive Security locking	○	IR key	○
Anti-panic mechanical device (IME-CO48)	○	6-position key selector (with Reset)	○
DAS card	○	Inputs Module (NO/NC)	○
Inside radar (NO, NC, Self-controlled) / Outside radar (NO, NC)	○	Outputs Module (2 switches)	○
Opening/Closing safeties (NO, NC, IR curtain x4)	○	Emergency Exit module EN 16005	○
RAL lacquer finish, AS1, Anodised - colour (As standard)	●	Special lacquering, stainless steel (On request)	○

(\*) Specific achievement, contact us

• Standard ° Option



[www.portalp.com](http://www.portalp.com)

PORTALP - 7 Rue d'Arcelle - 38600 FONTAINE - France

